AZECA™

*Ditch the Wire!*

# *Stereo* Bluetooth® *Folding Headset*

AZECA®
AZECA®
AZECA®

## *Owner's Manual*

Bluetooth®

***Model BTH010***

*Thank you for choosing the Azeca headset Model BTH010. Please read this user's manual carefully before use.*

## Features

- Play music from your Smartphone or MP3 player*
- Answer smartphone calls, redial, mute, or make voice calls
- Easily folds into portable travel case
- Automatically pairs with last *Bluetooth*® device
- USB rechargeable
- Play music – 3.5 hours, Talk – 5 hours, Standby – 6 days
- *Bluetooth* profiles (V2.1+EDR): A2DP, AVRCP, HFP, HSP

## Includes

- Stereo *Bluetooth* headset
- USB to mini USB charging cable
- Protective travel case
- User's manual
- Warranty card

**Note:**
Even though the paired device and the headset support the same *Bluetooth* profiles, functions may vary due to specification differences of the paired devices.

*** Disclaimer**
To pair a device to this headset the device must support the listed *Bluetooth* profiles. For MP3 connectivity the device must support the A2DP profile or via a stereo *Bluetooth* transmitter/dongle. Some features may not be supported by all devices. Contact the device manufacturer regarding feature compatibility.

## Using the Headset

### Overview - Components

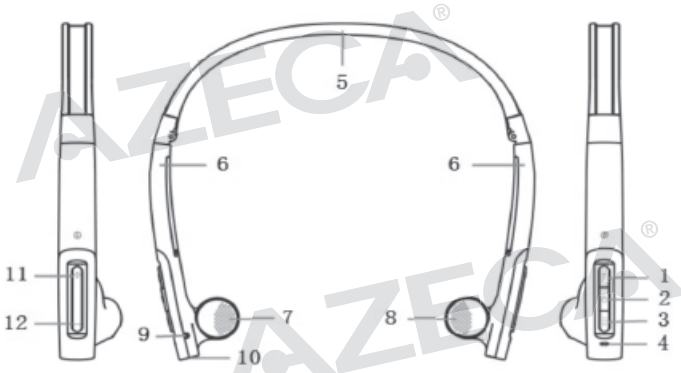


| | |
|---|---|
| **1** | ⏮ Previous track |
| **2** | ⏻ Multi-function button |
| **3** | ⏭ Next track |
| **4** | LED indicator |
| **5** | Headband |
| **6** | Folding and retractable |
| **7** | Right loudspeaker |
| **8** | Left loudspeaker |
| **9** | Microphone |
| **10** | Micro USB - Charging jack |
| **11** | VOL+ Volume up |
| **12** | VOL− Volume down |

## Charging the headset

The headset comes with a built-in rechargeable battery, prior to first time use it is recommendable to fully charge the battery.

When the headset battery power is low, the LED indicator flashes red twice accompanied by three beeps.

## Using a USB cable

Connect the USB cable to a computer USB port and the USB cable plug to the charging jack of the headset. A Red LED will remain on while the headset is charging. Average charging time is two hours. When charging is complete the red LED will turn off.

## Using a USB travel charger (not included)

Plug in USB travel charger to a standard power outlet. Connect the USB cable to the USB plug on the travel charger and then connect the charger plug to the charging jack of the headset as indicated above.

## Turning on/off the headset

| FUNCTION | OPERATION | LED INDICATOR | INDICATION TONE |
|---|---|---|---|
| Turn on | Press and hold ⏻ for 3-5 seconds until blue LED flashes | Blue LED is on for 1 second | A long "DI" tone |
| Turn off | Press and hold ⏻ for 2-3 seconds until red LED flashes | Red LED is on for 1 second | A long "DI" tone |

**Note:**
In order to save power the headset will turn off automatically if no device is paired within 5 minutes.

## Pairing the headset with *Bluetooth* devices

How to enter pairing mode:

| FUNCTION | STATUS OF BTH010 | LED INDICATOR | INDICATION TONE |
|---|---|---|---|
| ENTER Pairing Mode | Ensure the headset is turned off, and then press and hold ⏻ for 5 to 7 seconds until LED flashes red and blue alternately | LED flashes red and blue alternately | Two short "DU" tones |

**Note:**
If the headset is not paired with another Bluetooth device after two minutes, the headset will return to standby mode automatically in order to conserve power.

## Pairing the headset with a *Bluetooth* cell phone

Pairing procedures are subject to different models of cell phones. Please refer to your cell phone user's manual for further information. The general pairing procedure is as follows:

1) Place the headset and Bluetooth cell phone where they are easily viewable - no more than 1 meter apart;
2) Enter the headset's pairing mode (please refer to "How to enter pairing mode)
3) Activate your cell phone's Bluetooth function and set your cell phone to search for Bluetooth devices. After the search is completed, select "BTH010" from the Bluetooth device list;
4) If requested enter password or PIN No:"0000" and press " Yes" or "confirm";
5) After successful pairing, select "BTH010" in the Bluetooth device list and press "connect".
6) After successfully connecting the blue LED flashes twice. While connected the blue LED will continue three quick flashes every 4 seconds.

**Note:**

- If pairing fails, turn off the headset and repeat the pairing process steps 1 through 6 mentioned above.

- After initial pairing, the headset will automatically pair with the last paired Bluetooth device.
- To pair the headset with other devices, repeats steps 1 through 6 mentioned above.
- If the Bluetooth version of your cell phone is V2.1 and above, you will not need to enter a pairing password as the headset and phone will match automatically.

## Pairing the headset with a *Bluetooth* transmitter

You can connect the headset to a Bluetooth transmitter/dongle to enjoy music wirelessly. The general pairing procedure is as follows:

1) Place the headset and the Bluetooth transmitter where they are easily viewable - no more than 1 meter apart;
2) Enter the headset's pairing mode (Please refer to "How to enter pairing mode);
3) Turn on the Bluetooth transmitter. It will search for Bluetooth devices automatically and send a pairing request;
4) When the headset requests to enter a PIN No., the transmitter will response "0000" automatically;
5) After successful pairing and connecting, the blue LED of the headset will flash twice quickly every 5 seconds.

**Note:**
- The pairing password of the headset is "0000". The headset can only pair with a Bluetooth transmitter with a matching pairing password.
- If pairing still fails after several tries, please refer to the Bluetooth transmitter's user's manual for further instructions.

## Multi-pairing

The headset can connect with two devices at most. For instance you can pair a cell phone supporting the Bluetooth HFP profile, and a transmitter/dongle supporting the Bluetooth A2DP profile. To multi-pair please refer to the following steps:

1) Firstly, pair the headset with a Bluetooth transmitter (refer to "Pairing the headset with a Bluetooth transmitter);
2) Turn off the Bluetooth transmitter;

3) Pair and connect the headset with a Bluetooth cell phone (refer to "Pairing the headset with a Bluetooth cell phone").
4) Turn on the Bluetooth transmitter; it will connect to the headset automatically.

**Note:**

- For cell phone supporting the HSP and A2DP Bluetooth profiles, pairing with the headset will simultaneously include both profiles and will not allow paring of an additional A2DP device.

## Re-connecting with a *Bluetooth* device

**1) Automatic pairing**

Every time the headset is turned on it will pair to last paired device automatically.

**2) Manual pairing to last connected HFP device**

When the headset is in standby mode and doesn't connect to any HFP devices, short press ⏻ twice, it will connect to last connected HFP device automatically.

**3) Manual pairing to last connected A2DP device**

When the headset is in standby mode and doesn't connect to any A2DP devices, short press ⏮ once, it will connect to last connected A2DP device automatically.

**Note:**

- The pairing password of the headset is "0000". The headset can only pair with a Bluetooth transmitter with a matching pairing password.

## Wearing the headset

The headband of the headset is folding and adjustable. Adjust each side length as needed. The "L" on the headset represents left ear, and the "R" on the headset represents right ear. Wear the headset according to "L" and "R" indicators.

## Making a call with the headset

| FUNCTION | STATUS OF BTH010 | OPERATION | INDICATION TONE |
|---|---|---|---|
| Voice dial | Stand by mode | Press and hold ⏭ for 2 seconds until hearing tone | A short tone |
| Redial last number | Stand by mode | Quickly press ⏻ button twice | A short tone |
| Volume up | During a call | Short or Long press VOL+ | |
| Volume down | During a call | Short or Long press VOL− | |
| Answer a call | Incoming ring | Short press ⏻ | A short tone |
| Reject a call | Incoming ring | Press and hold ⏻ for 2 seconds until hearing tone | A short tone |
| End a call | During a call | Short press ⏻ | A long tone |
| Call transfer | During a call | Press and hold ⏻ for 2 seconds until hearing tone | A long tone |
| Microphone mute | During a call | Quickly press ⏻ button twice | 2 failing tones |
| Cancel mute | During a call (mute) | Quickly press ⏻ button twice | 2 rising tones |

**Note:**

1) Not all cell phones support all functions listed above. Please refer to your cell phone's user's manual for additional information.
2) When the volume is adjusted to max. or min., you will hear a "DI" tone.

3) When pressing the answer button on some cell phones, the call will be transferred to the cell phone. You will then have to switch the call to the headset manually. Please refer to your cell phone's user's manual for additional information.

## Music playback

Enjoy stereo music with the headset after pairing to a device that supports the A2DP Bluetooth profile.

| FUNCTION | STATUS OF BTH010 | OPERATION |
|---|---|---|
| Volume up | Playing music | Short or Long press VOL+ |
| Volume down | Playing music | Short or Long press VOL− |
| Pause | Playing music | Short press ⏻ |
| Play | Playing music | Short press ⏻ |
| Previous track | Playing music | Short press ⏮ once |
| Next track | Playing music | Short press ⏭ once |

**Note:**

- When playing music on some cell phones, the music will be transmitted to the cell phone's speaker instead of the headset. Select "transmit the sound via Bluetooth" in the settings menu and then choose "BTH010" as the speaker device. The music will be transmitted to the headset. Please refer to your cell phone's user's manual for additional information.
- When the volume is adjusted to max. or min., you will hear a "DI" tone.
- To remotely control previous/next track, pause/play, your paired Bluetooth device must support the Bluetooth AVRCP profile. Please refer to the device user's manual for additional information.

## LED indicator

### 1) When the headset is charging

| LED Indicator | STATUS OF BTH010 |
|---|---|
| Red LED is on | Charging in progress |
| Red LED is off | Finish charging |

### 2) When the headset is connected to a Bluetooth device

| LED Indicator | STATUS OF BTH010 |
|---|---|
| LED flashes red and blue alternately | Pairing mode |
| Blue LED – 2 quick flashes every 2 seconds | Standby mode (not connected to a Bluetooth device) |
| Blue LED – 2 quick flashes every 4 seconds | Paired: HFP or A2DP connection |
| Blue LED – 3 quick flashes every 4 seconds | Paired: HFP or A2DP connection |
| Blue LED – 2 quick flashes every 3 seconds | Incoming call |
| Blue LED flashes once every 4 seconds | During a call |

### Indication tone

| Indication tone | STATUS OF BTH010 |
|---|---|
| Emits 2 tones every 5 second | During a call (Microphone mute) |
| Emits 3 “Dong” tones every 20 seconds | Low power |

## Care and maintenance

- Do not expose the headset to liquid, moisture or humidity.
- Do not use abrasive cleaning solvents to clean the headset.
- Do not expose the headset to extremely high or low temperatures.
- Do not dispose of the headset in a fire.
- Do not drop or exert excessive force on the headset as you may damage the internal circuit.
- Do not attempt to disassemble the headset as it will void the warranty.

## Troubleshooting

**My headset will not turn on**

- The battery is low and needs to be recharged.

**The red LED is not on when charging?**

- Make sure the charging cable is properly connected to the headset.
- If the headset is not used for an extended period of time, you may have to charge the battery for 30 minutes prior to seeing the red LED appear.

**The sound is cutting out**

- The average operating distance for this Class II device is 33 feet (10 meters). Interior walls, wireless routers, and cordless phones can reduce this operating distance.

**I cannot pair the headset with a device.**

- This headset will only work with devices that support the following Bluetooth profiles: A2DP, AVRCP, HFP, HSP
- Be sure to select "BTH010" from the list of found devices. Some phones require you to scroll through a list of previously paired devices.

**I still cannot get my speaker to work**

- Call our Help Desk at 1(888) 992-4639

| Specifications | |
|---|---|
| Bluetooth version | Bluetooth V2.1+EDR |
| Bluetooth profiles | HSP, HFP, A2DP and AVRCP |
| Operating distance | 10 meters, class II |
| Working time | Music: up to 4 hours<br>Talk: up to 5 hours<br>Standby: up to 6 days |
| Standby time | Up to 120 hours |
| Charing input voltage | DC +5.0±0.25VA |
| Charging time | Approx. 2 hours |
| Dimensions | 158×148×26mm |
| Weight | Approx.40 g (1.4 oz) |

AZECA®

**FCC Part 15**

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

**FCC Warning**

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**Canada ICES-003 statement**

This Class B digital apparatus complies with Canadian ICES-003.

**European Union Directives Conformance Statement**

Azeca Corp declares that this product is in compliance with:

- The key requirements and relevant provisions of Directive 1999/5/EC
- All other key EU Directives

**LIMITED WARRANTY**
Azeca Corp ("Azeca") warrants that (a) its Stereo Bluetooth Folding Headset (Model BTH010) will perform substantially in accordance with the accompanying written materials for a period of 6 months from the date of receipt and (b) that Model BTH010 (product) will be free from defects in materials and workmanship under normal use and service for a period of 6 months. In the event applicable law imposes any implied warranties, the implied warranty period is limited to (180) days from the date of receipt. Some jurisdictions do not allow such limitations on duration of an implied warranty, so the above limitation may not apply. Azeca Corp and its suppliers' entire liability and Customer's exclusive remedy shall be, at Azeca Corp's option, either (a) repair, or (b) replacement of the product that does not meet this Limited Warranty and which is returned to the Azeca Corp with a copy of Customer's receipt. This Limited Warranty is void if failure of the product has resulted from accident, abuse, disassembly, or misapplication. Any replacement product will be warranted for the remainder of the original warranty period or thirty (30) days, whichever is longer. This warranty is valid only to the original purchaser of the product in the United States.

**TO OBTAIN TECHNICAL SUPPORT OR RETURN INFORMATION**
Contact our support team at 1(888) 992-4639
Or email us at support@Azeca.com

**TO OBTAIN WARRANTY SERVICE**
If you purchased the product from a retailer or web retailer and you are returning the product within their return policy period, return the product with original receipt to the retailer or web retailer.

If you are outside the retailers return policy, contact the Azeca support center to receive a Return Authorization number and return address. Returned packages will not be accepted without a Return Authorization number.

**THIS WARRANTY DOES NOT COVER:**
Normal wear and tear, damage from accidents, negligence, misuse, abuse, acts of God, commercial use, modifications, attempts to repair, connection to an incorrect voltage supply, or cosmetic damage. This warranty also does not cover product sold refurbished or with all faults.

**WARRANTY LIMITATIONS**

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, AZECA CORP AND ITS SUPPLIERS DISCLAIM ALL OTHER WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WITH REGARD TO THE PRODUCT AND ANY RELATED WRITTEN MATERIALS. THIS LIMITED WARRANTY GIVES CUSTOMER SPECIFIC LEGAL RIGHTS. CUSTOMER MAY HAVE OTHER RIGHTS DEPENDING ON THE JURISDICTION.

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, IN NO EVENT SHALL AZECA CORP OR ITS SUPPLIERS BE LIABLE FOR ANY DAMAGES WHATSOEVER (INCLUDING WITHOUT LIMITATION, SPECIAL, INCIDENTAL, CONSEQUENTIAL, OR INDIRECT DAMAGES FOR PERSONAL INJURY, LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, LOSS OF BUSINESS INFORMATION, OR ANY OTHER PECUNIARY LOSS) ARISING OUT OF THE USE OF OR INABILITY TO USE THIS PRODUCT, EVEN IF AZECA CORP HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. IN ANY CASE, AZECA CORP AND ITS SUPPLIERS' ENTIRE LIABILITY UNDER ANY PROVISION OF THIS AGREEMENT SHALL BE LIMITED TO THE AMOUNT ACTUALLY PAID BY YOU FOR THE PRODUCT. BECAUSE SOME JURISDICTIONS DO NOT ALLOW THE EXCLUSION OR LIMITATION OF LIABILITY FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES, THE ABOVE LIMITATION MAY NOT APPLY TO YOU.

Contact Azeca Corp:
For customer service please call: 1-800-934-9839
www.Azeca.com

Distributed by:
Azeca Corp.
5400 Laurel Springs Pkwy, Suite 1307, Suwanee GA 30024 USA
Copyright© Azeca Corp. All rights reserved. Made in China

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Azeca Corp is under license. Other trademarks and trade names are those of their respective owners.

Other Products by Azeca

**Stereo *Bluetooth* Speaker**

Play music from your Smartphone or MP3 player

- Answer, redial or mute calls
- Built-in mic for hands-free communication
- Easy-to-reach controls for volume, next/previous track and pause
- Automatically pairs with last Bluetooth device
- Use battery or AC power
- 30 foot range

**Retractable Bluetooth Headset with Vibration**

Earbud retracts instantly

- Answer, redial, or made voice calls
- Vibrates when a call is received
- Clip-on or hang around neck
- Includes charging cable and case

**Stereo *Bluetooth* In-Car FM Transmitter**

Play Smartphone or MP3 music through your car stereo

- Answer Smartphone calls, redial or mute
- Built-in mic for hands-free communication
- Integral USB jack charges other devices
- Auto-scan finds best FM frequency
- Auto-pairs with last Bluetooth device

**Stereo *Bluetooth* Transmitter**

Add Stereo *Bluetooth* to any device with a headphone jack

- Great for MP3 players, and computers
- USB Rechargeable with 10 hour play time
- Includes Velcro for attaching to various devices
- Charge and listen simultaneously

**Visit www.Azeca.com more information or call customer service at 1(800) 934-9839**